


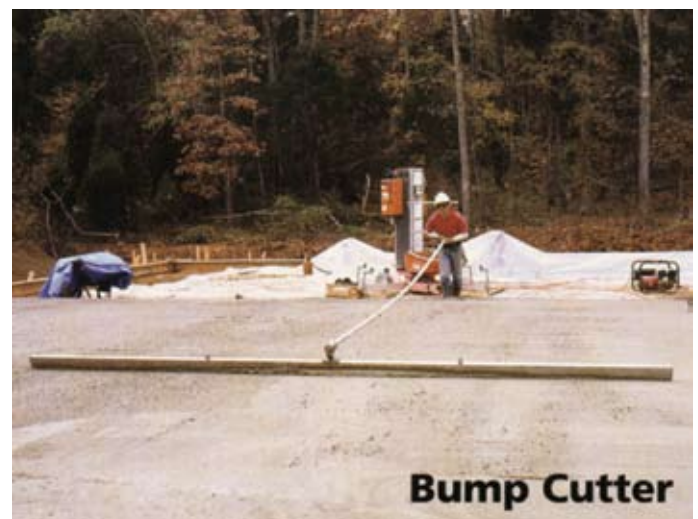


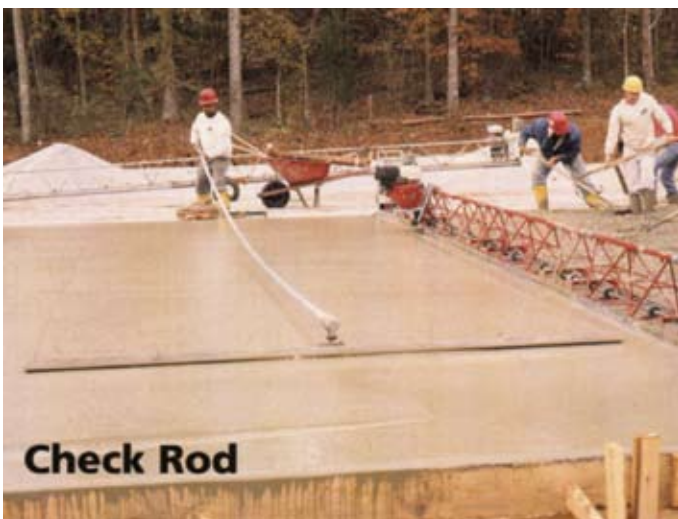

Concrete hand tools

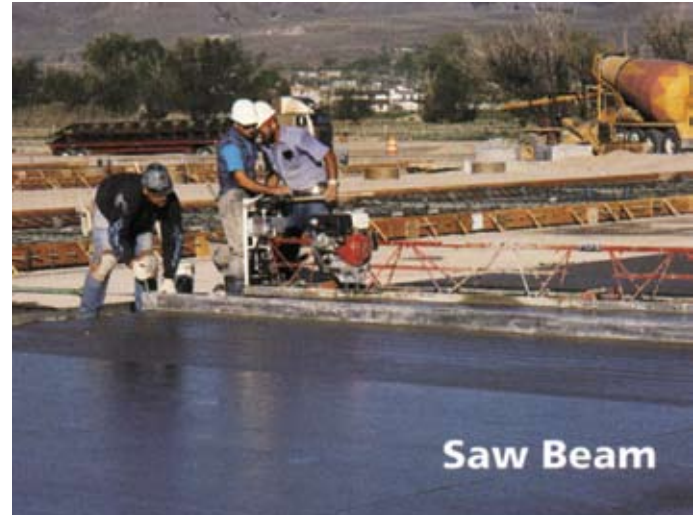


Art. No 11350-11810
Page 1 (2)
[page 235]

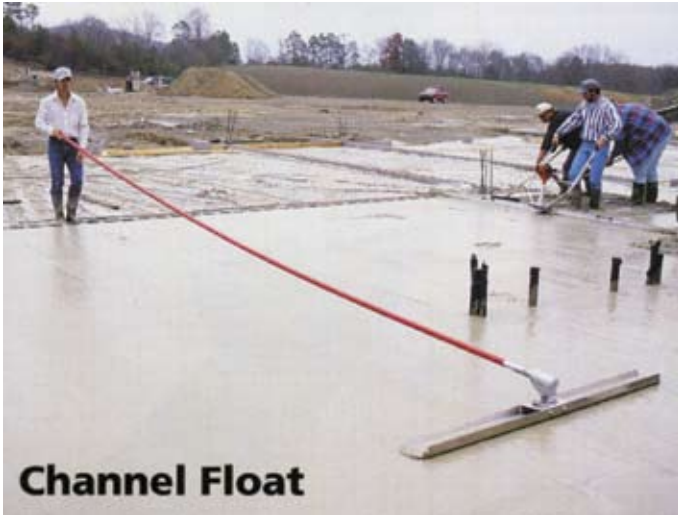

Allen® Concrete Hand Tools are specifically designed to improve the flatness (as measured by FF numbers) of concrete floors. These tools are made of extruded magnesium and checked to exact flatness tolerances during manufacture.

Allen® Concrete Hand Tools are available with either “Knucklehead” or “Rock-it” Pitch Adjusting Tools. All Hand Tools come standard with three 6’ (1.8m) snap-together handles made of either aluminum or a non conductive material. With four different models, Allen Hand Tools are your solution for consistent, high tolerance floors.



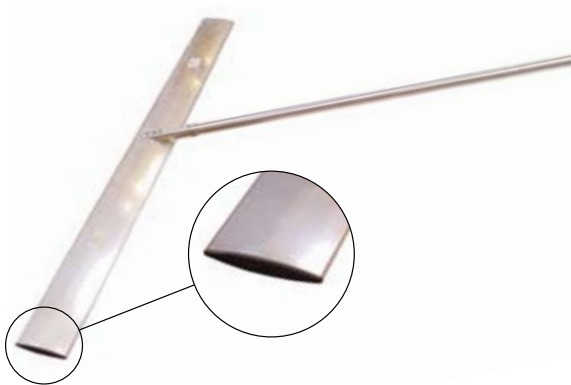

Swedish Float:

Tool widths:	1,1 m	1,5 m	2,2 m
Weight:	5 kg	6 kg	8 kg
Handle length:	3 m	3 m	3 m



Channel Float:

Use this tool in lieu of a traditional bull float for flatter floors.

Tool widths:	1,5 m	3,1 m	3,7 m
Weight:	10 kg	17 kg	19 kg
Handle length:	3 x 1,5 m		



Check Rod:

Use this tool to reduce bumps and fill in low spots when the concrete is still plastic.

Tool widths:	3,1 m	3,7 m
Weight:	13 kg	14 kg
Handle length:	3 x 1,5 m	



Bump Cutter:

Use this tool to cut down bumps and fill low areas on a concrete slab after it has been floated.

Tool widths:	3,1 m	3,7 m
Weight:	11 kg	12 kg
Handle length:	3 x 1,5 m	

ab lin-pro

Box 5, Femvägsskälet 3, 421 21 V. Frölunda, Sweden
Tfn. +46-31-29-88-10. Fax +46-31-29-88-76
info@alleneurope.com www.concretefloor.com

